


Thermo-Control[®]

The ultimate wood burning system.

Baffle Control Rod Replacement

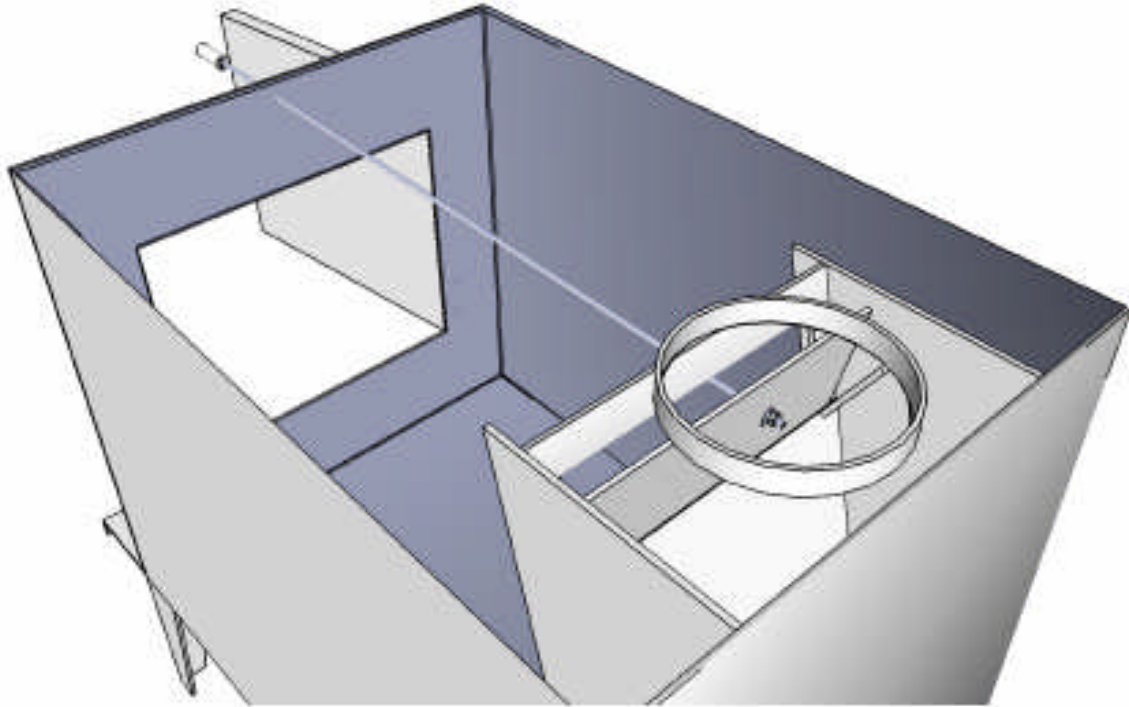

To Replace Control Rod:

1. Insert rod through front door into area next to rear baffle door opening and pull it toward front through small hole above door on the stove front.
2. Insert rod into hole in rear baffle.
3. While having someone hold the rod in place, reach down the flue collar to tighten a lock nut on threaded portion of the rod.
4. Push handle on front of baffle rod.